


ZX80 FULLY RUGGED TABLET



- Processore Qualcomm® QCS6490, Octa-core
- Display LumiBond da 8" con tecnologia Getac per la lettura sotto la luce del sole (1.000 nits) e touchscreen capacitivo utilizzabile con i guanti
- Batteria hot swap per un funzionamento ininterrotto sul campo
- Certificato per cadute fino a 1,8 metri (6ft), MIL-STD-810H e IP67
- Diverse configurazioni con strumenti di gestione di livello aziendale in un formato sottile e leggero
- Verificato come Android enterprise recommended ¹



ZX80 3D demo

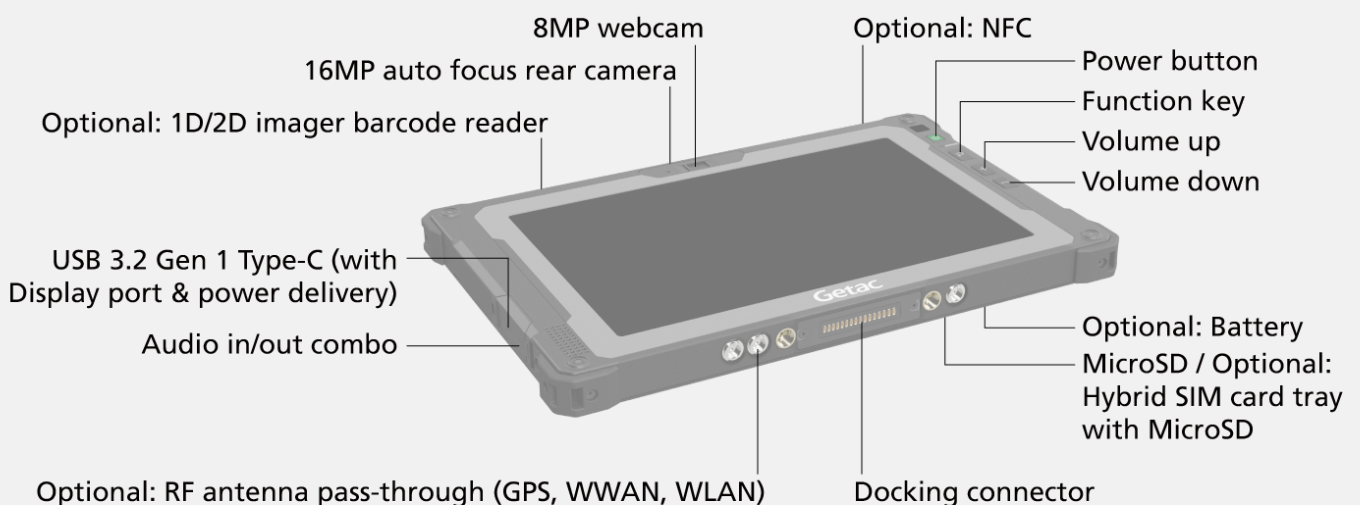

SPECIFICATIONS

Generation
G1

Operating System
Android™ 15.0ⁱ

Mobile Computing Platform
Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

Graphics
Qualcomm® Adreno™ 643 GPU

NPU
Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display
8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
12GB LPDDR5, 256GB UFS

Keyboard
Power button
3 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Audio
Integrated speakers
Integrated dual-array microphone

Expansion Slot
Optional: 1D/2D imager barcode reader
Optional: NFCⁱⁱ

I/O Interface
8MP webcam x 1
16MP auto focus rear camera x 1
Audio in/out combo x 1
USB 3.2 Gen 1 Type-C (with DisplayPort & Power Delivery) x 1
MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 4FF) tray with
MicroSD x 1ⁱⁱⁱ
Docking connector x 1
Optional: SIM card slot x 1 (Nano-SIM, 4FF)ⁱⁱⁱ
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Communication Interface
Wi-Fi 6E 802.11ax
Bluetooth (v5.2)^{iv}
Optional: Dedicated L1/L5 GPS^v
Optional: 4G LTE mobile broadbandⁱⁱⁱ
Optional: 5G Sub-6ⁱⁱⁱ
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)^{iii, vi}

Security Feature
Optional: NFCⁱⁱ

Power
Internal battery (3.86V, typical 4060mAh; min. 3950mAh)
LifeSupport battery swappable technology

Swappable Battery Options:
Battery bay cover (Default)
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh)

Dimension (W x D x H) & Weight
234 x 149.8 x 17.6mm (9.21" x 5.89" x 0.69")
590g (1.3lbs)^{vi}

Rugged Feature
MIL-STD-810H certified
IP67 certified
Vibration & 6ft (1.8m) drop resistant^{vii}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)^{viii}

Environmental Specification
Temperature^{ix}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Meet and photos)
Getac Log Tool
Getac Diagnostic
Getac Monitoring (trial version) agent/SDK
Getac Management (trial version) agent/SDK

Optional software
Getac Driving Safety Utility
Getac Monitoring
Getac Management
Getac OEMConfig

Accessories
Optional:
Carry bag
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh)
DC-DC vehicle adapter (65W, 12-32VDC)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hand strap with stylus holder
Rotating hand strap with kickstand
Shoulder strap (2-point)
Vehicle cradle^x
Vehicle dock^x
Office dock
65W USB-C AC Adapter

Bumper-to-Bumper warranty
Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare costosi tempi di inattività. Ecco perché Getac ha introdotto la copertura dei danni accidentali come standard della garanzia Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT. Bumper-to-Bumper è la garanzia senza problemi. Questo significa che potete contare su di noi affinché il vostro dispositivo sia nuovamente operativo nel giro di pochi giorni.

Standard
3 anni Bumper-to-Bumper

ZX80 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Support GPS, GLONASS, Galileo and BeiDou.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Available with limited configurations and environment conditions.
- IX. Tested by an independent third-party test lab following MIL-STD-810H.
- X. Gamber-Johnson vehicle dock and cradle are e-mark certified.
- XI. Units with 4G/5G option come with an embedded SIM card slot.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock (Gamber-Johnson)	Vehicle Dock (RAM Mounts)
Serial Port	1	-
Audio In/Out Combo	-	-
DC in Jack	-	-
USB	USB 2.0 x 2	USB 2.0 x 2
LAN	1	1
HDMI	-	-
RF Antenna Connector	3 (option) (WWAN, WLAN, GPS)	-
Kensington Lock	-	-



GETAC TECHNOLOGY CORPORATION
Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)
Tel: +39 039 8901584
Sales-getac-Italy@getac.com |
www.getac.com/it/
Copyright © 2026 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.