


LX500e

COLOR LABEL PRINTER



NEW!

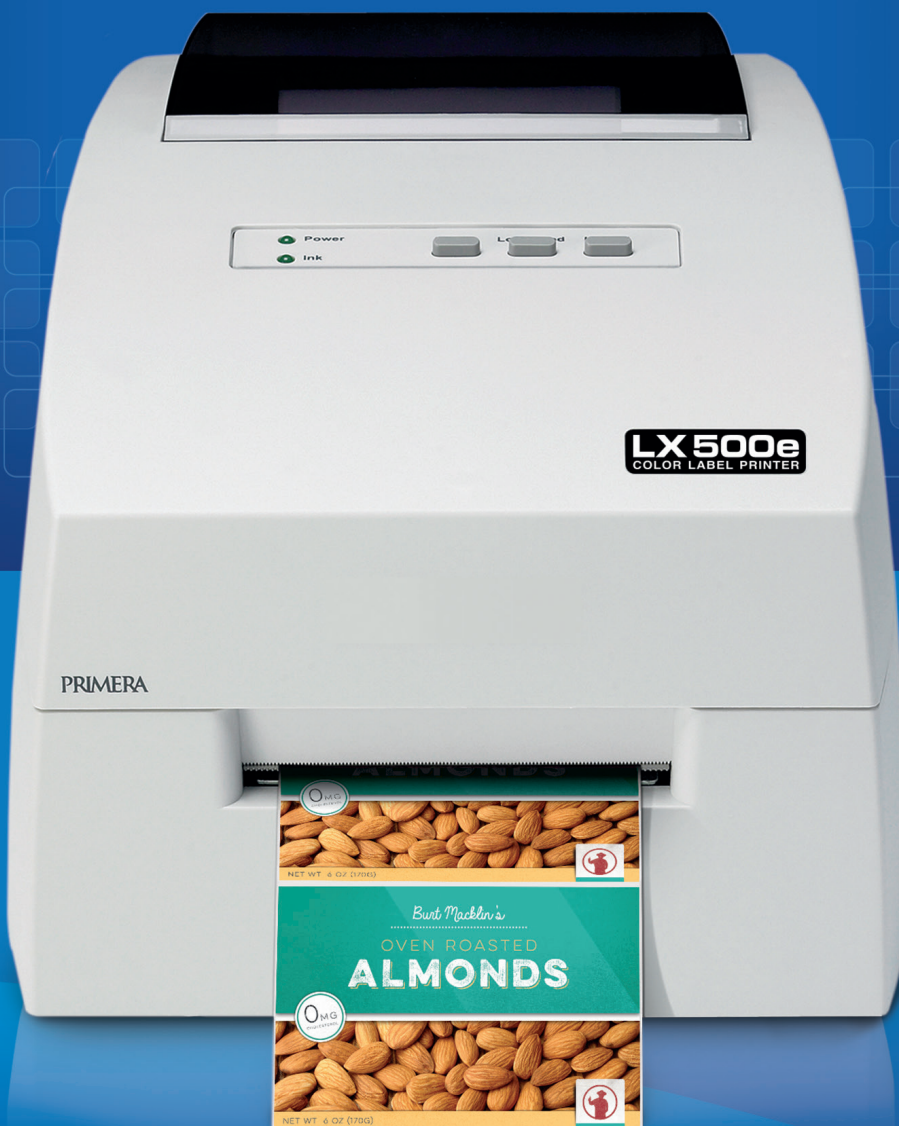

Save Time and Money by Printing Your Own Short-Run Colour Labels!

LX500e utilizes the latest in high-resolution inkjet technology to print brilliant full-colour product labels right in your office or production facility.

KEY FEATURES OF LX500e:

- » Optional built-in label cutter
- » Small, compact size
- » Prints up to 101.6mm (4") wide
- » 4800 dpi full-colour printing



PRIMERA
TECHNOLOGY, INC.

LX500e

COLOR LABEL PRINTER



LX500ec model, featuring a built-in guillotine cutter

The built-in cutter allows you to cut die-cut, reflective and continuous label stock and offers several cut options. You can choose between the cut modes:

- do not cut – for usage with a rewinder,
- cut after no activity – for cutting when the print job is finished,
- cut after button press – for cutting when you choose to press the button,
- cut after every label – for producing e.g. single price tags or ID cards,
- cut after x labels – which gives you the opportunity to choose the number of labels that needs to stay in one row before cutting.

Technical Specifications

Print Method:	Inkjet
Print Resolutions:	4800 x 1200 dpi, 2400 x 1200 dpi, 600 x 600 dpi
Print Speed:	Up to 50.8 mm (2") per second
Ink Cartridges:	Colour (CMY)
Colours:	16.7 million
Print Width:	19mm (0.75") to 101.6mm (4")
Print Length:	19mm (0.75") to 609.6mm (24")
Media Width:	25.4mm (1") to 108mm (4.25")
Media Types:	Roll-fed pressure-sensitive labels, roll-fed tags, fan-fold labels or tags
Media Sensing:	Moveable see-through sensor for die-cut labels; Reflective for labels and tags with black stripe; Continuous label stock; Preprinted label stock.
Supply Roll:	127mm (5") maximum diameter on 50.8mm (2") core. Core has additional restrictions – see manual.
Ink Level Warning:	Calculates actual number of prints remaining based upon ink usage of graphics being printed (patent-pending)
Indicator Lights:	Power, Ink
Controls:	Pause, Load/Feed, Unload
Recommended Minimum System:	For PC: Pentium® IV computer or better, 512MB RAM, 5GB free hard drive space, USB 2.0 or USB 1.1 For Mac: 1 GHz Intel processor or higher, capable of running Mac OS X v10.9 or higher, 1GB RAM, one available USB port
Label Design Software:	NiceLabel® SE Primera Edition and Bartender Ultralite included. Can also be used with most other popular label design software programs.
Electrical Rating:	12VDC, 5.0A
Power Requirements:	100-240VAC, 50/60 Hz, 60 watts
Certifications:	UL, UL-C, CE
Weight:	3.2 kg (7.0 lbs.)
Dimensions:	264mmW x 389mmD x 180mmH (closed), 442mmH (open) (10.4"W x 15.3"D x 7.1"H (closed), 17.4"(open))
Options:	Ink Cartridge, Tri-Color #53374 LX500e #074274 LX500ec #074276 (with cutter)
Operating Systems:	Windows® 7/8/10+, Mac OS X 10.9 or higher
Included:	Label design software for Windows, 4x3" Paper High Gloss starter roll and starter tri-color cartridge.



PRIMERA
TECHNOLOGY EUROPE™

Mainzer Strasse 131
65187 Wiesbaden/Germany
primeralabel.eu

Phone: +49 611 92777-0
Fax: +49 611 92777-50
E-Mail: sales@primera.eu